

WaStop® Inline Check Valve Technical Specification Stainless Steel AISI 304/316


| | | | |
|----------------------|---|------------------|-----|
| Model no.: | N/A | WS340-S3-304/316 | N/A |
| Nominal Size: | 350 mm | | |
| Pipe: | Stainless Steel AISI 304/316 | | |
| Membrane: | Polyurethane | | |
| Fasteners: | Marine grade stainless steel (AISI 316) | | |

| Technical data: | Soft (S2) | Standard (S3) | Hard (S4) |
|-------------------------------|--------------------------|--------------------------|--------------------------|
| Max. back pressure*: | N/A mmH ₂ O | 5 mmH ₂ O | 8 mmH ₂ O |
| Horizontal opening pressure*: | N/A mmH ₂ O | 325** mmH ₂ O | N/A** mmH ₂ O |
| Horizontal closing pressure*: | N/A mmH ₂ O | 195** mmH ₂ O | N/A** mmH ₂ O |
| Submerged opening pressure*: | N/A** mmH ₂ O | 205** mmH ₂ O | N/A** mmH ₂ O |
| Submerged closing pressure*: | N/A** mmH ₂ O | 60** mmH ₂ O | N/A** mmH ₂ O |
| Vertical opening pressure*: | N/A mmH ₂ O | 350** mmH ₂ O | N/A** mmH ₂ O |
| Vertical closing pressure*: | N/A** mmH ₂ O | 205** mmH ₂ O | N/A** mmH ₂ O |

*) +/- 15% **) Modeled value
 - Values measured from bottom of pipe.
 - Tests performed at room temperature (16-20°C).

| Max Flow | m/s | l/s |
|----------|-----|-----|
| | 3 | 290 |

- Higher flows requires custom valve, contact Wapro
 - Flange installation is highly recommended at flows above 2 m/s

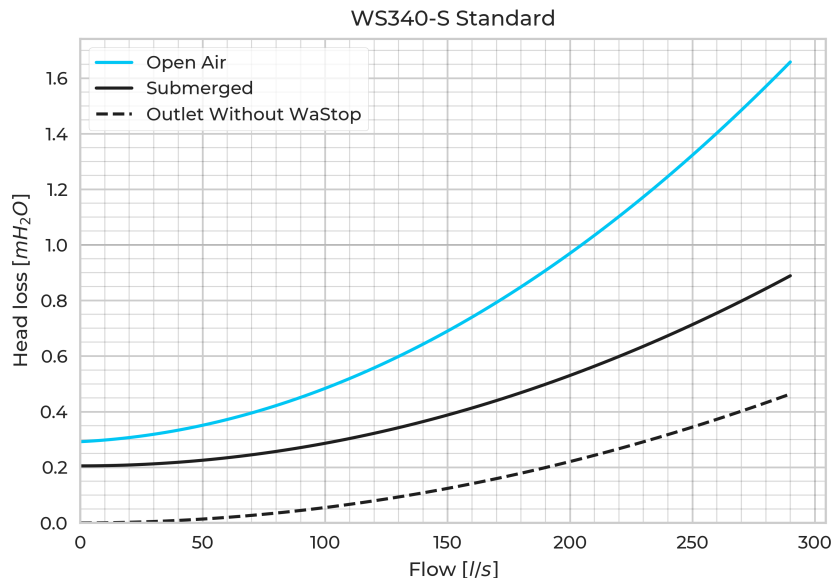

In the submerged case opening pressure [mmH₂O /inH₂O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.