


## **WAGATE® GATE VALVE**

## **SVM-TG 125**

| Model Name                                    | SVM-TG125       |
|---|-----------------|
| Nominal Diameter                              | NPS/OD 5        |
| Pipe Type                                     | SDR17           |
| Spindle Mtrl.                                 | Duplex SAF 2205 |
| Spindle Nut Mtrl.                             | CuSn12          |
| Valve Body Mtrl.                              | PE              |
| Watertightness                                | DIN 19569-4     |
| Revs open [-]                                 | 33.0            |
| Thread pitch [in]                             | 0.2             |
| Torque [ft-lb]                                | 9.5             |
| Weight [lb]                                   | 24.3            |
| Max. On-Seating pressure [ftH <sub>2</sub> O] | 131.2           |

## **Product Variants**

| Art. No             | V70076125 |
|---------------------|-----------|
| Fasteners mtrl.     | AISI 316L |
| Gasket Mtrl.        | EPDM      |
| Knife Mtrl.         | AISI 316L |
| Reinforcement Mtrl. | AISI 316L |

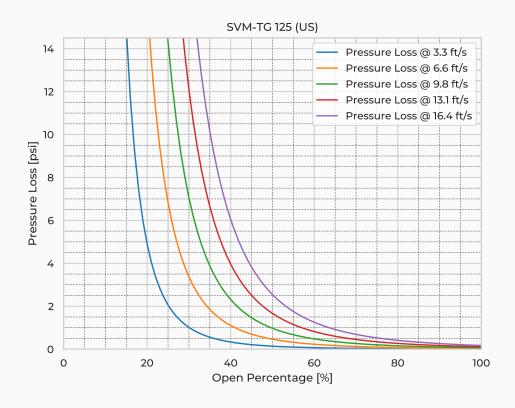

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved