


WASTOP® ACCESS

WaStop Access DN125 WS125

| Model Name | WS125-WA425 |
|------------------|-------------|
| Nominal Diameter | NPS/OD 5 |
| Bracket mtrl. | AISI 316L |
| Chamber mtrl. | PE |
| Connection pipe | 125 PE |
| Fasteners mtrl. | AISI 316L |
| Plate mtrl. | PVC |
| Watertightness | EN 13564 |
| Weight [lb] | 28.7 |

Product Variants

| Art. No | WS125-WA425-S2 | WS125-WA425-S3 |
|---|----------------|----------------|
| Horizontal Opening [inH2O] | 6.3 | 8.1 |
| Horizontal Closing [inH ₂ O] | 3.0 | 3.3 |
| Submerged Opening [inH2O] | 5.5 | 5.5 |
| Submerged Closing [inH ₂ O] | 0.6 | 0.6 |
| Vertical Opening [inH2O] | 9.1 | 9.1 |
| Vertical Closing [inH2O] | 4.7 | 4.7 |

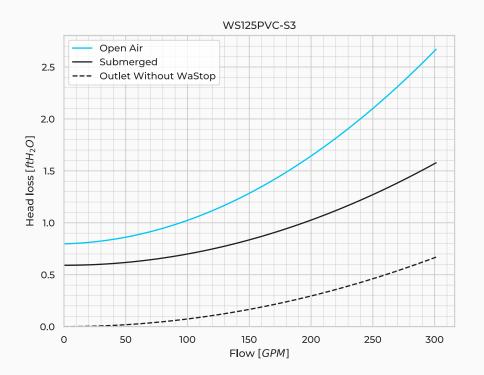

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com