


WASTOP® INLINE CHECK VALVE

WaStop 146

Model Name	WS146
Nominal Diameter	NPS 6
Fasteners mtrl.	AISI 316L
Gasket Mtrl.	EPDM
Watertightness	EN 13564
Weight [lb]	5.7
Min. ID Host Pipe [in]	5.7
Max. ID Host Pipe [in]	6.3
Max. Flow Vel. [fps]	6.6
Max. Flow Vol. [GPM]	570.6

Product Variants

Art. No	WS146-S2-316	WS146-S3-316	WS146-S4-316
Valve Body mtrl.	AISI 316L	AISI 316L	AISI 316L
Max. Back Pressure [ftH ₂ O]	9.8	16.4	26.2
Horizontal Opening [inH2O]	7.8	9.1	13.1
Horizontal Closing [inH ₂ O]	2.9	3.1	4.2
Submerged Opening [inH ₂ O]	5.9	6.9	7.9
Submerged Closing [inH ₂ O]	0.8	1.0	1.4
Vertical Opening [inH ₂ O]	9.4	13.8	15.2
Vertical Closing [inH ₂ O]	4.3	4.7	5.1

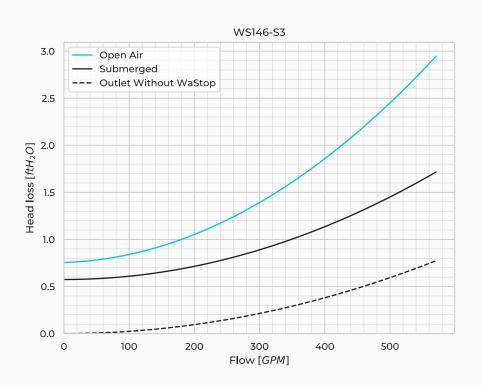

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com