


WASTOP® PLASTIC SERIES

WaStop 200 PVC

Model Name	WS200PVC
Nominal Diameter	DN/OD 200
Fasteners mtrl.	EN 1.4404
Watertightness	EN 13564
Weight [kg]	3.7
Max. Flow Vel. [m/s]	2
Max. Flow Vol. [I/s]	63

Product Variants

Art. No	WS200PVC-S2	WS200PVC-S3	WS200PVC-S4
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone
Valve Body mtrl.	PVC	PVC	PVC
Max. Back Pressure [mH ₂ O]	3	5	8
Horizontal Opening [mmH ₂ O]	215	235	315
Horizontal Closing [mmH ₂ O]	115	120	165
Submerged Opening [mmH ₂ O]	150	170	190
Submerged Closing [mmH ₂ O]	30	35	45
Vertical Opening [mmH ₂ O]	270	295	325
Vertical Closing [mmH ₂ O]	155	180	200

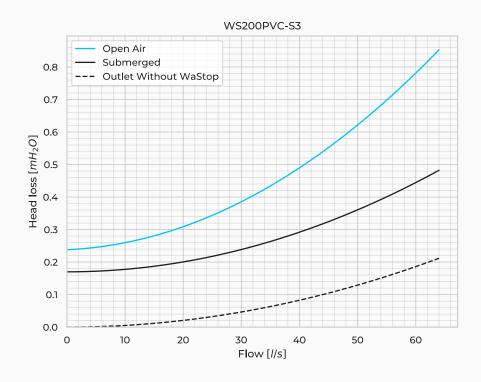

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved