


WASTOP® INLINE CHECK VALVE

WaStop 240

WS240
DN 250
EN 1.4404
EPDM
EN13564
6.7
242
258
2
100

Product Variants

Art. No	WS240-S3-316	WS240-S4-316
Membrane mtrl.	Polyurethane	Polyurethane
Valve Body mtrl.	EN 1.4404	EN 1.4404
Max. Back Pressure [mH ₂ O]	5	8
Horizontal Opening [mmH ₂ O]	205	350
Horizontal Closing [mmH ₂ O]	120	110
Submerged Opening [mmH ₂ O]	125	310
Submerged Closing [mmH ₂ O]	35	65
Vertical Opening [mmH ₂ O]	320	345
Vertical Closing [mmH ₂ O]	200	200

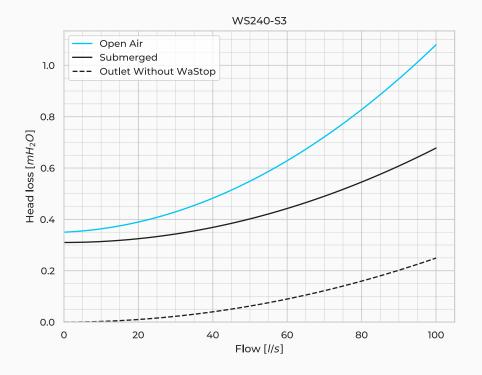

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com