


## **WASTOP® INLINE CHECK VALVE**

## WaStop 370

Model Name	WS370
Nominal Diameter	DN 370
Fasteners mtrl.	EN 1.4404
Gasket Mtrl.	EPDM
Weight [kg]	19
Min. ID Host Pipe [mm]	374
Max. ID Host Pipe [mm]	390
Max. Flow Vel. [m/s]	3
Max. Flow Vol. [I/s]	378

## **Product Variants**

Art. No	WS370-S3-316	WS370-S4-316
Membrane mtrl.	Polyurethane	Polyurethane
Valve Body mtrl.	EN 1.4404	EN 1.4404
Max. Back Pressure [mH <sub>2</sub> O]	5	8
Horizontal Opening [mmH <sub>2</sub> O]	255	330
Horizontal Closing [mmH <sub>2</sub> O]	160	200
Submerged Opening [mmH <sub>2</sub> O]	140	190
Submerged Closing [mmH <sub>2</sub> O]	45	80
Vertical Opening [mmH <sub>2</sub> O]	360	330
Vertical Closing [mmH <sub>2</sub> O]	210	190

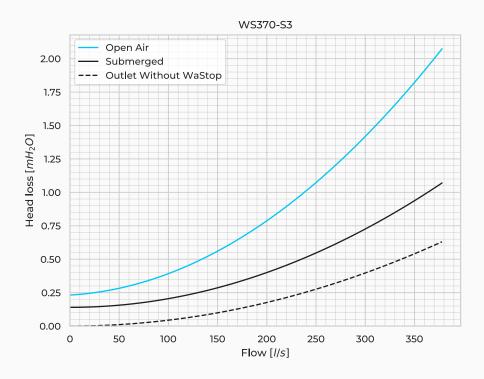

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved