


## WASTOP® INLINE CHECK VALVE

## WaStop 515

-	
Model Name	WS515
Nominal Diameter	DN 500
Fasteners mtrl.	EN 1.4404
Weight [kg]	37
Max. ID Host Pipe [mm]	536
Min. ID Host Pipe [mm]	518
Max. Flow Vel. [m/s]	4
Max. Flow Vol. [l/s]	833

## **Product Variants**

Art. No	WS515-S3-304/316	WS515-S4-304/316
Membrane mtrl.	Polyurethane	Polyurethane
Horizontal Opening [mmH <sub>2</sub> O]	270	360
Horizontal Closing [mmH <sub>2</sub> O]	165	180
Submerged Opening [mmH <sub>2</sub> O]	185	210
Submerged Closing [mmH <sub>2</sub> O]	55	70
Vertical Opening [mmH <sub>2</sub> O]	400	440
Vertical Closing [mmH2O]	240	265

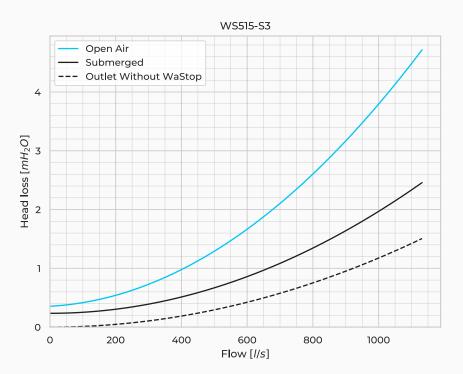

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

+46 (0)454 185 10 wapro@wapro.com