


WASTOP® PLASTIC SERIES

WaStop 110 PVC

Model Name	WS110PVC
Nominal Diameter	NPS/OD 4
Fasteners mtrl.	AISI 316L
Watertightness	EN 13564
Weight [lb]	1.5
Max. Flow Vel. [fps]	6.6
Max. Flow Vol. [GPM]	301.2

Product Variants

Art. No	WS110PVC-S2	WS110PVC-S3	WS110PVC-S4
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone
Valve Body mtrl.	PVC	AISI 316L	AISI 316L
Max. Back Pressure [ftH ₂ O]	9.8	16.4	26.2
Horizontal Opening [inH ₂ O]	6.7	7.3	9.4
Horizontal Closing [inH ₂ O]	2.7	2.8	3.1
Submerged Opening [inH ₂ O]	5.3	6.1	6.9
Submerged Closing [inH ₂ O]	0.6	0.8	1.0
Vertical Opening [inH ₂ O]	8.3	9.8	10.8
Vertical Closing [inH ₂ O]	3.1	3.5	3.9

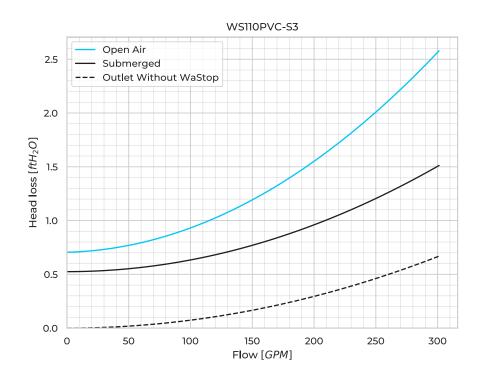

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved