


WASTOP® INLINE CHECK VALVE

WaStop 1385 Bell Bolt

| Model Name | WS1385-BB |
|------------------------|-----------|
| Nominal Diameter | DN 1400 |
| Fasteners mtrl. | EN 1.4404 |
| Weight [kg] | 560 |
| Min. ID Host Pipe [mm] | 1393 |
| Max. ID Host Pipe [mm] | 1430 |
| Max. Flow Vel. [m/s] | 5 |
| Max. Flow Vol. [l/s] | 7698 |

Product Variants

| Art. No | WS1385-S3-BB-304/316 |
|---|-----------------------|
| Membrane mtrl. | Polyurethane |
| Valve Body mtrl. | EN 1.4404 / EN 1.4301 |
| Max. Back Pressure [mH ₂ O] | 5 |
| Horizontal Opening [mmH ₂ O] | 400 |
| Horizontal Closing [mmH ₂ O] | 280 |
| Submerged Opening [mmH ₂ O] | 370 |
| Submerged Closing [mmH ₂ O] | 240 |

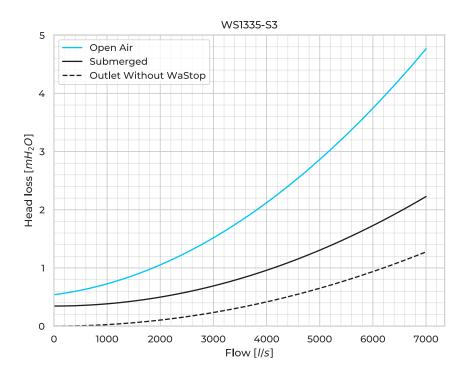

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved