


WASTOP® INLINE CHECK VALVE

WaStop 146

Model Name	WS146
Nominal Diameter	DN 150
Fasteners mtrl.	EN 1.4404
Gasket Mtrl.	EPDM
Watertightness	EN 13564
Weight [kg]	2.6
Min. ID Host Pipe [mm]	146
Max. ID Host Pipe [mm]	159
Max. Flow Vel. [m/s]	2
Max. Flow Vol. [l/s]	36

Product Variants

Art. No	WS146-S2-316	WS146-S3-316	WS146-S4-316
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone
Valve Body mtrl.	EN 1.4404	EN 1.4404	EN 1.4404
Max. Back Pressure [mH ₂ O]	3	5	8
Horizontal Opening [mmH ₂ O]	200	230	335
Horizontal Closing [mmH ₂ O]	75	80	105
Submerged Opening [mmH ₂ O]	150	175	200
Submerged Closing [mmH ₂ O]	20	25	35
Vertical Opening [mmH ₂ O]	240	350	385
Vertical Closing [mmH ₂ O]	110	120	130

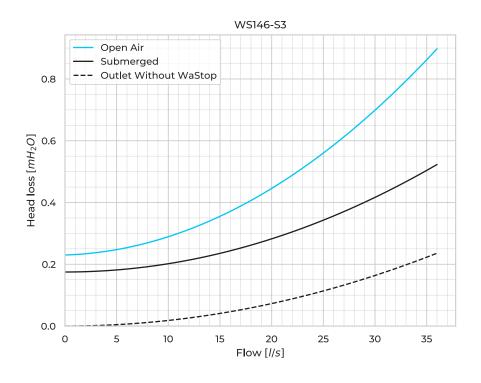

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved