


## **WASTOP® PLASTIC SERIES**

## WaStop 160 PVC

Model Name	WS160PVC
Nominal Diameter	NPS/OD 6
Fasteners mtrl.	AISI 316L
Watertightness	EN 13564
Weight [lb]	4.4
Max. Flow Vel. [fps]	6.6
Max. Flow Vol. [GPM]	634.0

## **Product Variants**

Art. No	WS160PVC-S2	WS160PVC-S3	WS160PVC-S4
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone
Valve Body mtrl.	PVC	PVC	PVC
Max. Back Pressure [ftH <sub>2</sub> O]	9.8	16.4	26.2
Horizontal Opening [inH <sub>2</sub> O]	8.4	8.9	12.5
Horizontal Closing [inH <sub>2</sub> O]	3.4	3.4	3.8
Submerged Opening [inH <sub>2</sub> O]	6.1	7.1	7.5
Submerged Closing [inH <sub>2</sub> O]	0.9	1.0	1.6
Vertical Opening [inH <sub>2</sub> O]	9.3	10.4	11.4
Vertical Closing [inH <sub>2</sub> O]	4.9	5.5	6.5

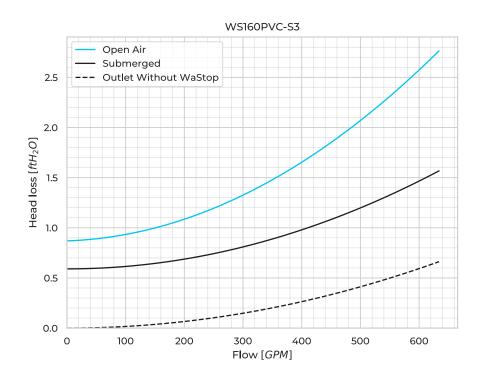

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved