


## **WASTOP® PLASTIC SERIES**

## WaStop 200 PVC

Model Name	WS200PVC
Nominal Diameter	DN/OD 200
Fasteners mtrl.	EN 1.4404
Watertightness	EN 13564
Weight [kg]	3.7
Max. Flow Vel. [m/s]	2
Max. Flow Vol. [I/s]	63

## **Product Variants**

Art. No	WS200PVC-S2	WS200PVC-S3	WS200PVC-S4	WS200PVC-C
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone	EPDM
Valve Body mtrl.	PVC	PVC	PVC	PVC
Max. Back Pressure [mH <sub>2</sub> O]	3	5	8	5
Horizontal Opening [mmH <sub>2</sub> O]	215	235	315	210
Horizontal Closing [mmH <sub>2</sub> O]	115	120	165	110
Submerged Opening [mmH <sub>2</sub> O]	150	170	190	170
Submerged Closing [mmH <sub>2</sub> O]	30	35	45	35
Vertical Opening [mmH <sub>2</sub> O]	270	295	325	295
Vertical Closing [mmH <sub>2</sub> O]	155	180	200	180

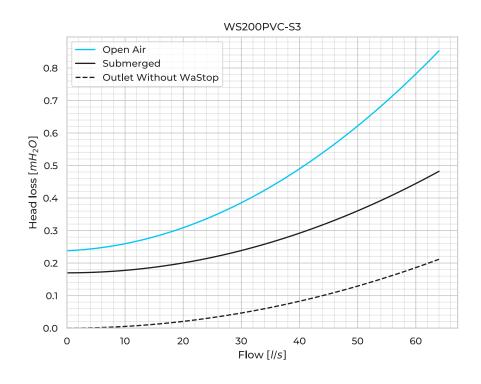

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved