

SLUICE GATE - SPM-P-TG DN 800-1400

AREA OF USE: Sewer and stormwater, industrial facilities and process water.
SPM-P-TG seals from both sides.

ADVANTAGES WITH WAGATE SPM-P-TG:

- No welding of the frame, thus significantly reducing corrosion degradation, therefore longer operational life
- Encapsulated bearing and sliding parts built into PEHD housing, thereby no degradation from the medium
- Easy assembly with mounting brackets locked in the frame, as well as fixed lifting brackets
- Non-rising spindle, integrated and shielded at the damper plate

OPERATION: Manually with hand wheel. Can be used with electric or hydraulic actuators.

SPECIAL DESIGN: Other pressure upon request. Spindle and nut above surface level (pedestal-mounted). Round opening.




MATERIAL:

Frame	EN 1.4404 (EN 1.4462)
Damper plate	PEHD
Bracing on the damper plate	EN 1.4404 (EN 1.4462)
Spindle	EN 1.4571 (EN 1.4462)
Spindle nut	Tin bronze (Cu2Sn12)
Seal against the damper plate	EPDM
Seal against the wall	EPEM sponge rubber

TECHNICAL DATA:

Sealing according to	DIN EN 12266.1
----------------------	----------------

SLUICE GATE - SPM-P-TG DN 800-1400

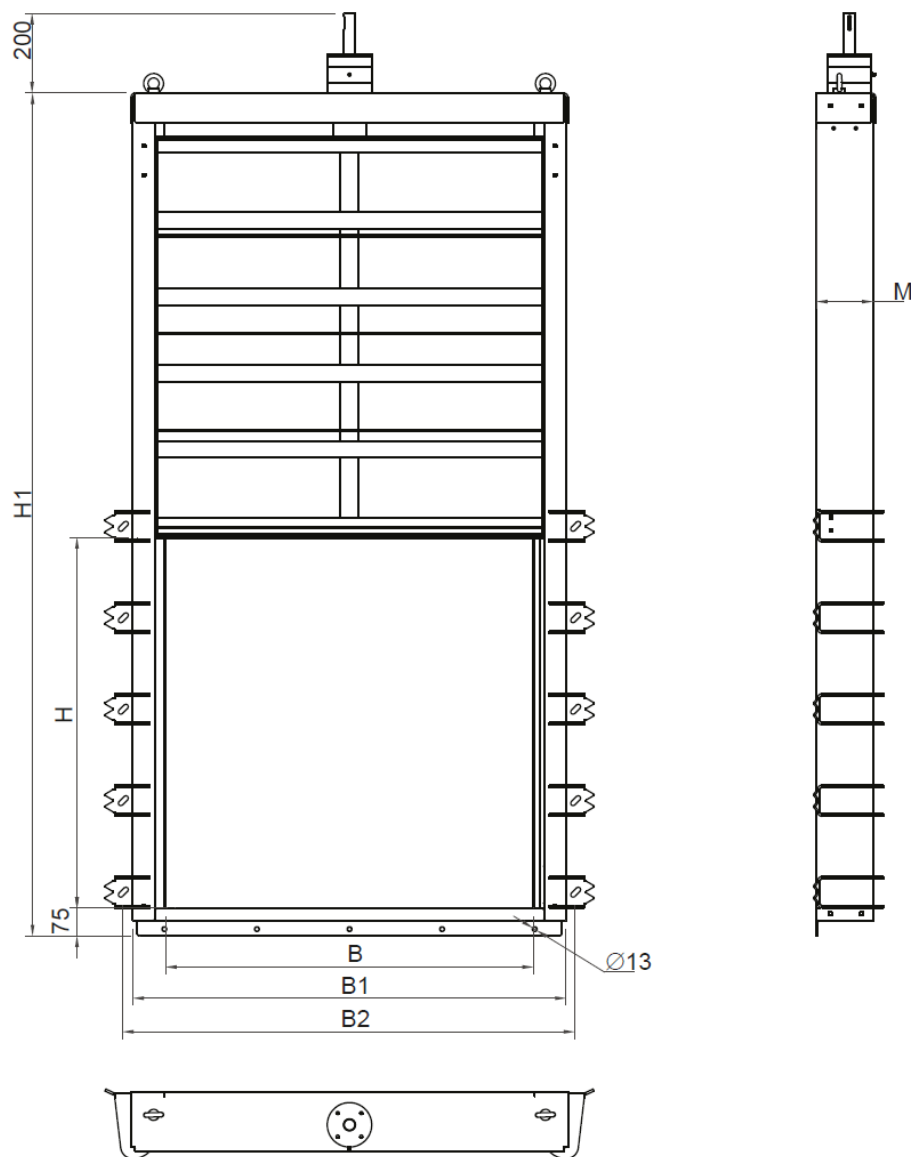

DIMENSIONS IN [MM]

DN	H	H1	B	B1	B2	ØR	ØS	M	NM	TURNS TO OPEN	WEIGHT [KG]	MVS
800	800	1842	800	960	997	16 x Ø13	25	142	35	160	145	6
1000	1000	2280	1000	1170	1207	19 x Ø13	30	160	65	167	185	6
1200	1200	2683	1200	1370	1407	21 x Ø13	30	160	90	200	231	6
1400	1400	3039	1400	1570	1607	24 x Ø13	30	160	140	234	270	6

Other dimensions on request. Reserves the right to changes.