


## WAGATE® GATE VALVE

## **SVM-TG 630**

| Model Name                   | SVM-TG630                       |
|------------------------------|---------------------------------|
| Nominal Diameter             | DN/OD 630                       |
| Gasket                       | EPDM                            |
| Operating Temperature        | -25° C - +40° C                 |
| Ріре Туре                    | SDR26                           |
| Reinforcement                | EN 1.4404                       |
| Spindle                      | EN 1.4571                       |
| Spindle Nut                  | CuSn12                          |
| Valve body                   | PE                              |
| Watertightness               | DIN 19569-4 table no. 1 class 5 |
| Closing torque [Nm]          | 29                              |
| Opening torque [Nm]          | 95.5                            |
| Pressure [mH <sub>2</sub> O] | 20                              |
| Revs open [-]                | 123                             |
| Thread pitch [mm]            | 5                               |
| Weight [kg]                  | 159                             |
|                              |                                 |

## **Product Variants**

| Art. No | V70076630 |
|---------|-----------|
| Knife   | EN 1.4404 |

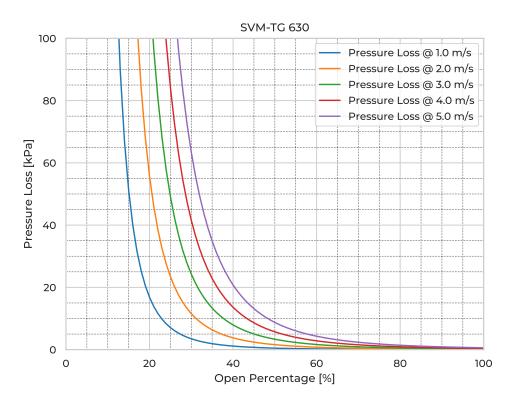

© 2025 Wapro A/S. This document is subject to copyrights owned by Wapro A/S. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved