


WASTOP® PLASTIC SERIES

WaStop 125 PVC

Model Name	WS125PVC
Nominal Diameter	DN/OD 125
Fasteners mtrl.	EN 1.4404
Watertightness	EN 13564
Weight [kg]	0.9
Max. Flow Velocity [m/s]	2
Max. Flow Volume [I/s]	19

Product Variants

Art. No	WS125PVC-S2	WS125PVC-S3	WS125PVC-S4
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone
Valve Body	PVC	PVC	PVC
Max. Back Pressure [mH ₂ O]	3	5	8
Horizontal Opening [mmH ₂ O]	160	205	245
Horizontal Closing [mmH ₂ O]	75	85	85
Submerged Opening [mmH ₂ O]	140	140	180
Submerged Closing [mmH ₂ O]	15	15	25
Vertical Opening [mmH ₂ O]	230	230	280
Vertical Closing [mmH ₂ O]	120	120	145

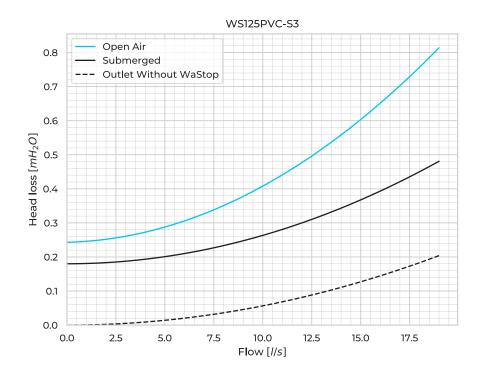

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved