




WASTOP® INLINE CHECK VALVE

WaStop 183

Model Name	WS183
Nominal Diameter	DN 200
Fasteners mtrl.	EN 1.4404
Gasket	EPDM
Watertightness	EN 13564
Weight [kg]	4
Max. ID Host Pipe [mm]	200
Min. ID Host Pipe [mm]	182
Max. Flow Velocity [m/s]	2
Max. Flow Volume [l/s]	64

Product Variants

Art. No	WS183-S2-316	WS183-S3-316	WS183-S4-316	WS183-C-316
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone	EPDM
Valve Body	EN 1.4404	EN 1.4404	EN 1.4404	EN 1.4404
Max. Back Pressure [mH ₂ O]	3	5	8	5
Horizontal Opening [mmH ₂ O]	205	235	335	290
Horizontal Closing [mmH ₂ O]	90	100	155	100
Submerged Opening [mmH ₂ O]	175	200	225	200
Submerged Closing [mmH ₂ O]	30	35	45	35
Vertical Opening [mmH ₂ O]	265	315	350	315
Vertical Closing [mmH ₂ O]	165	285	315	285
CO ₂ Equivalent (CO ₂ e) [kg CO ₂ e/unit]	32.1	32.2	-	-

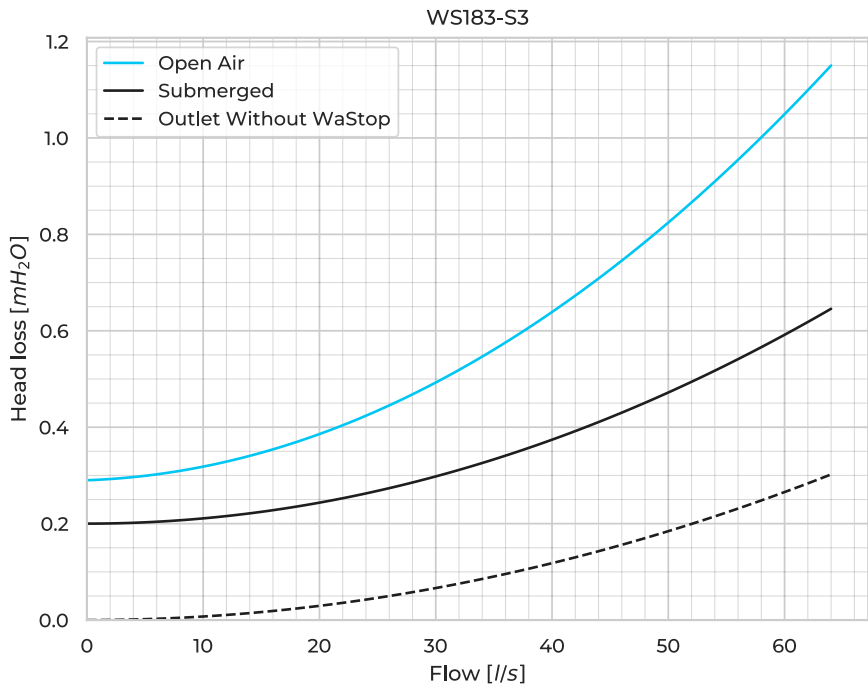

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved