


## **WASTOP® INLINE CHECK VALVE**

## WaStop 240

Model Name	WS240
Nominal Diameter	DN 250
Fasteners mtrl.	EN 1.4404
Gasket	EPDM
Weight [kg]	6.7
Min. ID Host Pipe [mm]	242
Max. ID Host Pipe [mm]	258
Max. Flow Velocity [m/s]	2
Max. Flow Volume [l/s]	100

## **Product Variants**

Art. No	WS240-S3-316	WS240-S4-316
Membrane mtrl.	Polyurethane	Polyurethane
Valve Body	EN 1.4404	EN 1.4404
Max. Back Pressure [mH <sub>2</sub> O]	5	8
Horizontal Opening [mmH <sub>2</sub> O]	205	350
Horizontal Closing [mmH <sub>2</sub> O]	120	110
Submerged Opening [mmH <sub>2</sub> O]	125	310
Submerged Closing [mmH <sub>2</sub> O]	35	65
Vertical Opening [mmH <sub>2</sub> O]	320	345
Vertical Closing [mmH <sub>2</sub> O]	200	200
CO2 Equivalent (CO2e) [kg CO2e/unit]	44	-

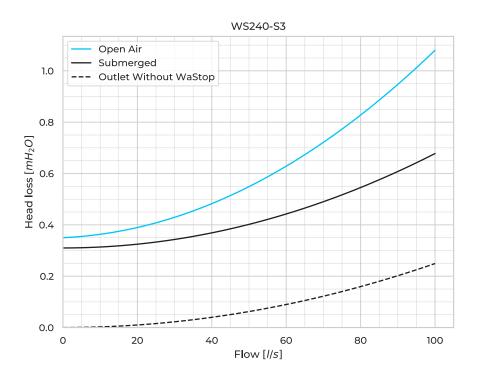

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com