


WASTOP® PLASTIC SERIES

WaStop 160 PVC

Model Name	WS160PVC
Nominal Diameter	DN/OD 160
Fasteners mtrl.	EN 1.4404
Watertightness	EN 13564
Weight [kg]	2
Max. Flow Velocity [m/s]	2
Max. Flow Volume [l/s]	40

Product Variants

Art. No	WS160PVC-S2	WS160PVC-S3	WS160PVC-S4
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone
Valve Body	PVC	PVC	PVC
Max. Back Pressure [mH ₂ O]	3	5	8
Horizontal Opening [mmH ₂ O]	215	225	320
Horizontal Closing [mmH ₂ O]	85	85	95
Submerged Opening [mmH ₂ O]	155	180	190
Submerged Closing [mmH ₂ O]	20	25	40
Vertical Opening [mmH ₂ O]	235	265	290
Vertical Closing [mmH ₂ O]	125	140	165

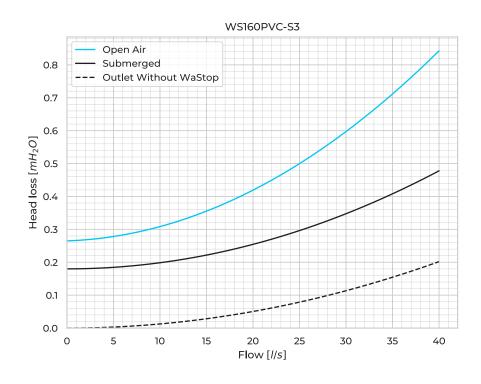

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved