


WASTOP® INLINE CHECK VALVE

WaStop 215

•	
Model Name	WS215
Nominal Diameter	DN 200
Fasteners mtrl.	EN 1.4404
Gasket	EPDM
Weight [kg]	4.5
Min. ID Host Pipe [mm]	216
Max. ID Host Pipe [mm]	233
Max. Flow Velocity [m/s]	2
Max. Flow Volume [l/s]	80

Product Variants

Art. No	WS215-S3-316	WS215-S4-316
Membrane mtrl.	EPDM	Polyurethane
Valve Body	EN 1.4404	EN 1.4404
Max. Back Pressure [mH ₂ O]	5	8
Horizontal Opening [mmH ₂ O]	190	340
Horizontal Closing [mmH ₂ O]	115	160
Submerged Opening [mmH2O]	160	320
Submerged Closing [mmH ₂ O]	45	65
Vertical Opening [mmH ₂ O]	255	355
Vertical Closing [mmH ₂ O]	185	210
CO2 Equivalent (CO2e) [kg CO2e/unit]	36.3	53
Weight [kg]	5.6	9.8

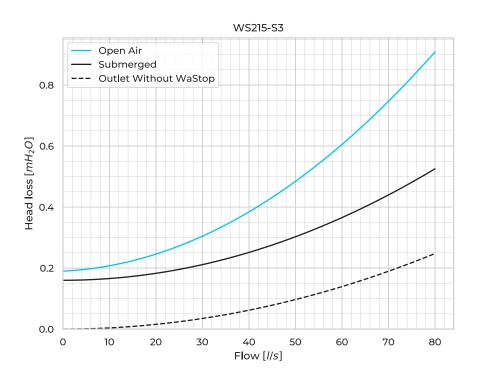

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com