


## **WASTOP® INLINE CHECK VALVE**

## WaStop 240

•	
Model Name	WS240
Nominal Diameter	NPS 10
Fasteners mtrl.	AISI 316L
Gasket	EPDM
Weight [lb]	14.8
Min. ID Host Pipe [in]	9.5
Max. ID Host Pipe [in]	10.2
Max. Flow Velocity [fps]	6.6
Max. Flow Volume [GPM]	1585.0

## **Product Variants**

Art. No	WS240-S3-316	WS240-S4-316
Membrane mtrl.	Polyurethane	Polyurethane
Valve Body	AISI 316L	AISI 316L
Max. Back Pressure [ftH <sub>2</sub> O]	16.4	26.2
Horizontal Opening [inH2O]	8.1	13.8
Horizontal Closing [inH2O]	4.7	4.3
Submerged Opening [inH <sub>2</sub> O]	4.9	12.2
Submerged Closing [inH <sub>2</sub> O]	1.4	2.6
Vertical Opening [inH <sub>2</sub> O]	12.6	13.6
Vertical Closing [inH <sub>2</sub> O]	7.9	7.9
CO <sub>2</sub> Equivalent (CO <sub>2</sub> e) [lb CO <sub>2</sub> e/unit]	97.0	129.0
Weight [lb]	14.6	23.7

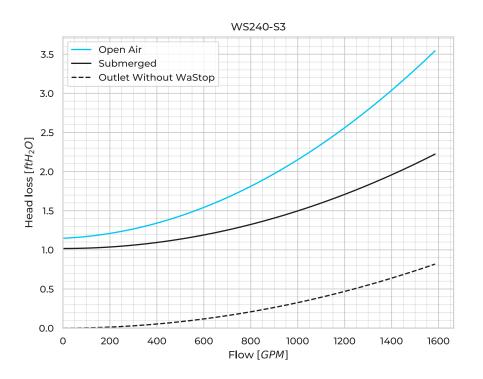

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com