


WASTOP® INLINE CHECK VALVE

WaStop 215

| Model Name | WS215 |
|--------------------------|-----------|
| Nominal Diameter | NPS 8 |
| Fasteners mtrl. | AISI 316L |
| Gasket | EPDM |
| Weight [lb] | 9.9 |
| Min. ID Host Pipe [in] | 8.5 |
| Max. ID Host Pipe [in] | 9.2 |
| Max. Flow Velocity [fps] | 6.6 |
| Max. Flow Volume [GPM] | 1268.0 |

Product Variants

| Art. No | WS215-S3-316 | WS215-S4-316 |
|--|--------------|--------------|
| Membrane mtrl. | EPDM | Polyurethane |
| Valve Body | AISI 316L | AISI 316L |
| Max. Back Pressure [ftH ₂ O] | 16.4 | 26.2 |
| Horizontal Opening [inH ₂ O] | 7.4 | 13.4 |
| Horizontal Closing [inH ₂ O] | 4.4 | 6.3 |
| Submerged Opening [inH ₂ O] | 6.3 | 12.6 |
| Submerged Closing [inH ₂ O] | 1.8 | 2.6 |
| Vertical Opening [inH ₂ O] | 10.0 | 14.0 |
| Vertical Closing [inH ₂ O] | 7.3 | 8.3 |
| CO ₂ Equivalent (CO ₂ e) [lb CO ₂ e/unit] | 80.0 | 116.8 |
| Weight [lb] | 12.3 | 21.6 |
| | | |

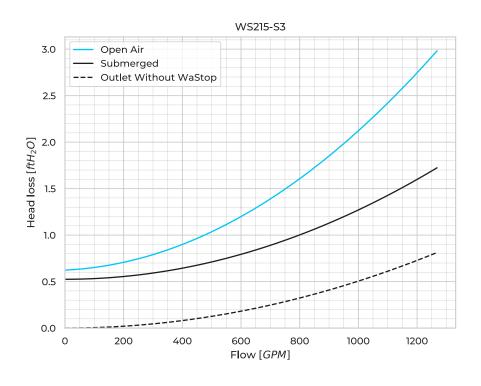

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved