

WASTOP® INLINE CHECK VALVE


WaStop 340

Model Name	WS340
Nominal Diameter	NPS 14
Fasteners mtrl.	AISI 316L
Gasket	EPDM
Weight [lb]	36.4
Min. ID Host Pipe [in]	13.5
Max. ID Host Pipe [in]	14.2
Max. Flow Velocity [fps]	9.8
Max. Flow Volume [GPM]	4596.6

Product Variants

Art. No	WS340-S3-316	WS340-S4-316
Membrane mtrl.	EPDM	Polyurethane
Valve Body	AISI 316L	AISI 316L
Max. Back Pressure [ftH ₂ O]	16.4	26.2
Horizontal Opening [inH ₂ O]	8.7	17.3
Horizontal Closing [inH ₂ O]	5.5	9.8
Submerged Opening [inH ₂ O]	2.2	10.4
Submerged Closing [inH2O]	1.4	3.1
Vertical Opening [inH ₂ O]	13.4	17.9
Vertical Closing [inH ₂ O]	9.1	10.6
CO ₂ Equivalent (CO ₂ e) [lb CO ₂ e/unit]	226.0	-
Weight [lb]	36.0	-

WS340-S3 HEADLOSS (US UNITS)

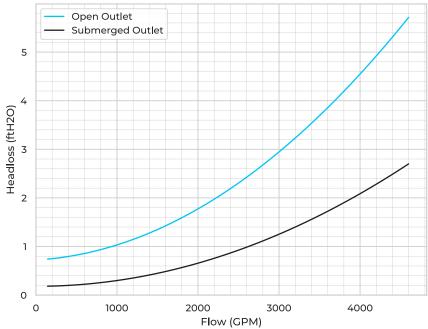

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved