




WASTOP® INLINE CHECK VALVE

WaStop 440 One Collar

Model Name	WS440-OC
Nominal Diameter	DN 450
Fasteners mtrl.	EN 1.4404
Gasket	EPDM
Weight [kg]	26.5
Min. ID Host Pipe [mm]	434
Max. ID Host Pipe [mm]	464
Max. Flow Velocity [m/s]	3
Max. Flow Volume [l/s]	478

Product Variants

Art. No	WS440-S2-OC-304/316	WS440-S3-OC-304/316	WS440-S4-OC-304/316
Membrane mtrl.	Polyurethane	Polyurethane	Polyurethane
Valve Body	EN 1.4301 / EN 1.4404	EN 1.4301 / EN 1.4404	EN 1.4301 / EN 1.4404
Max. Back Pressure [mH ₂ O]	3	5	8
Horizontal Opening [mmH ₂ O]	200	230	520
Horizontal Closing [mmH ₂ O]	135	155	190
Submerged Opening [mmH ₂ O]	125	145	165
Submerged Closing [mmH ₂ O]	40	45	60
Vertical Opening [mmH ₂ O]	345	385	420
Vertical Closing [mmH ₂ O]	205	230	250
CO ₂ Equivalent (CO ₂ e) [kg CO ₂ e/unit]	-	144.7	-
Weight [kg]	-	25.4	-

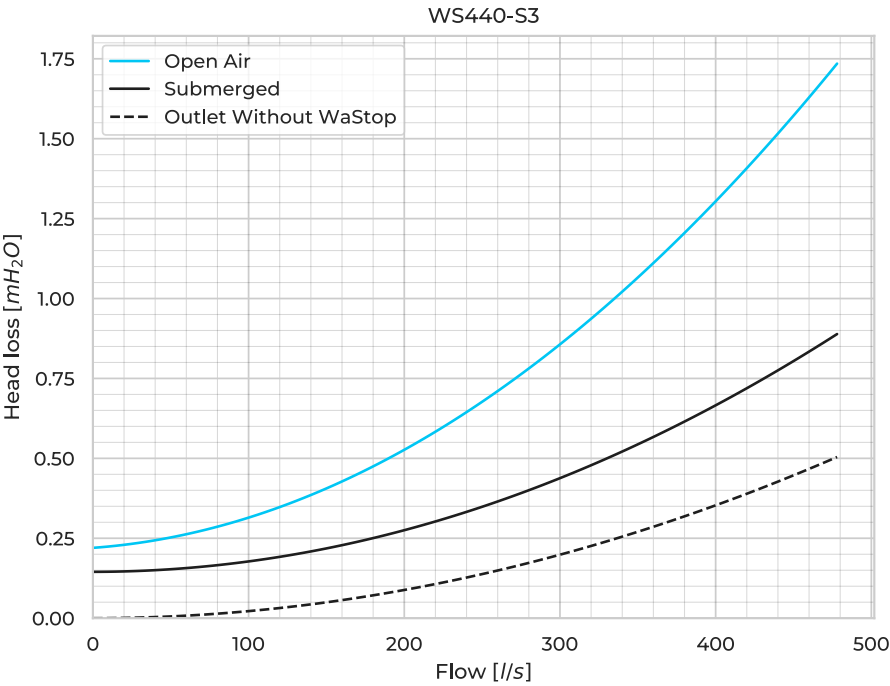

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved