

WaStop® Inline Check Valve Technical Specification PVC


Model no.:	WS75PVC-S3	WS75PVC-S4	WS75PVC-S5
Nominal Size:	3		
Pipe:	PVC		
Membrane:	Silicone		
Fasteners:	Marine grade stainless steel (AISI 316)		

Technical data:	Soft (S2)	Standard (S3)	Hard (S4)
Max. back pressure*:	9,8 ft H ₂ O	16,4 ft H ₂ O	26,2 ft H ₂ O
Horizontal opening pressure*:	N/A in H ₂ O	9,1** in H ₂ O	8,7** in H ₂ O
Horizontal closing pressure*:	N/A in H ₂ O	3,5** in H ₂ O	3,5** in H ₂ O
Submerged opening pressure*:	N/A** in H ₂ O	5,9** in H ₂ O	6,7** in H ₂ O
Submerged closing pressure*:	N/A** in H ₂ O	1** in H ₂ O	1,4** in H ₂ O
Vertical opening pressure*:	N/A** in H ₂ O	8,9** in H ₂ O	9,6** in H ₂ O
Vertical closing pressure*:	N/A** in H ₂ O	4,1** in H ₂ O	4,1** in H ₂ O

*) +/- 15% **) Modeled value
 - Values measured from bottom of pipe.
 - Tests performed at room temperature (61-68°F).

Max Flow	f/s	GPM
	7	195

- Higher flows requires custom valve, contact Wapro
 - Flange installation is highly recommended at flows above 6.5 f/s

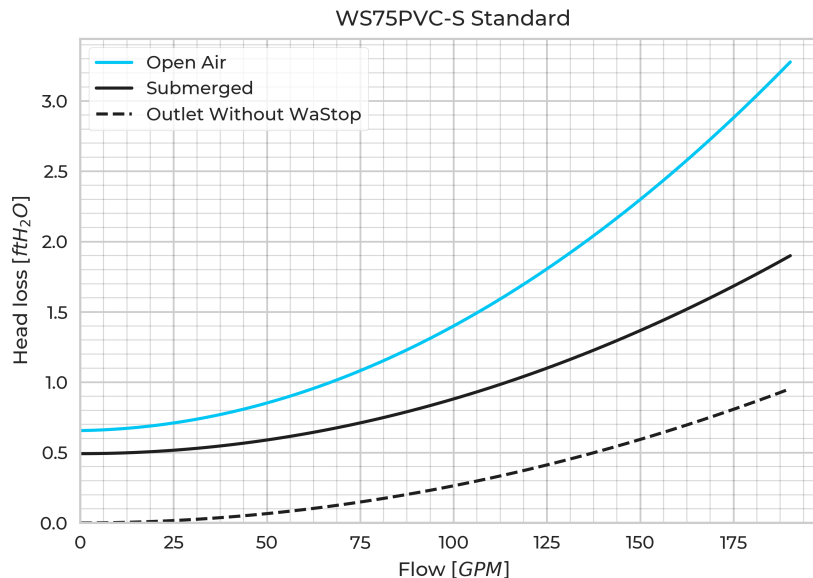

In the submerged case opening pressure [mmH₂O /inH₂O] is the difference between the water level upstream and the water level downstream and in the open-air case to the invert of the pipe. In vertical applications, the vertical opening pressure is measured from the outlet of the WaStop.