


WASTOP® PLASTIC SERIES

WaStop 110 PVC

Model Name	WS110PVC
Nominal Diameter	DN/OD 110
Fasteners mtrl.	EN 1.4404
Watertightness	EN 13564
Weight [kg]	0.7
Max. Flow Vel. [m/s]	2
Max. Flow Vol. [I/s]	19

Product Variants

Art. No	WS110PVC-S2	WS110PVC-S3	WS110PVC-S4
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone
Valve Body mtrl.	PVC	EN 1.4404	EN 1.4404
Max. Back Pressure [mH ₂ O]	3	5	8
Horizontal Opening [mmH ₂ O]	170	185	240
Horizontal Closing [mmH ₂ O]	70	70	80
Submerged Opening [mmH ₂ O]	135	155	175
Submerged Closing [mmH ₂ O]	15	20	25
Vertical Opening [mmH ₂ O]	210	250	275
Vertical Closing [mmH ₂ O]	80	90	100

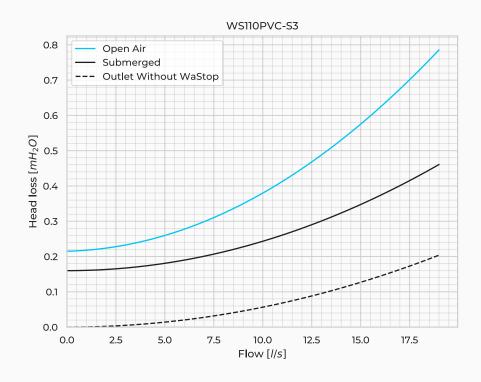

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved