


WASTOP® INLINE CHECK VALVE

WaStop 985 Bell Bolt

Model Name	WS985-BB
Nominal Diameter	DN 1000
Fasteners mtrl.	EN 1.4404
Weight [kg]	147
Min. ID Host Pipe [mm]	1012
Max. ID Host Pipe [mm]	990
Max. Flow Vel. [m/s]	4
Max. Flow Vol. [l/s]	3142

Product Variants

Art. No	WS985-S3-BB-304/316	WS985-S4-BB-304/316
Membrane mtrl.	Polyurethane	Polyurethane
Valve Body mtrl.	EN 1.4404 / EN 1.4301	EN 1.4404 / EN 1.4301
Max. Back Pressure [mH ₂ O]	5	8
Horizontal Opening [mmH ₂ O]	405	455
Horizontal Closing [mmH ₂ O]	265	300
Submerged Opening [mmH ₂ O]	235	265
Submerged Closing [mmH ₂ O]	80	105
Vertical Opening [mmH ₂ O]	450	495
Vertical Closing [mmH ₂ O]	270	295

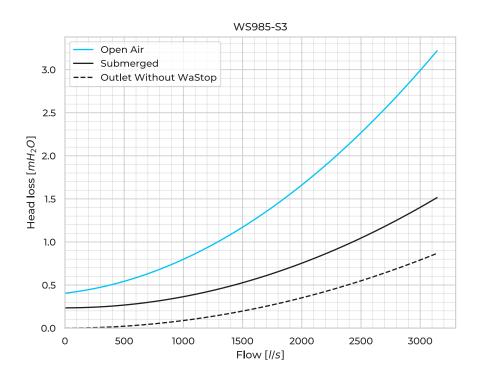

© 2024 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved