


## **WASTOP® ACCESS**

## WaStop Access DN110 WS110

Model Name	WS110-WA425
Nominal Diameter	NPS/OD 4
Bracket	AISI 316L
Chamber	PE
Fasteners mtrl.	AISI 316L
Gate	PVC
Pipe connection	110 PE
Watertightness	EN 13564 5
Weight [lb]	28.7

## **Product Variants**

Art. No	WS110-WA425-S2	WS110-WA425-S3	WS110-WA425-S4	WS110-WA425-C3
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone	EPDM
Horizontal Opening [inH <sub>2</sub> O]	6.7	7.3	9.4	7.1
Horizontal Closing [inH <sub>2</sub> O]	2.7	2.8	3.1	3.1
Submerged Opening [inH <sub>2</sub> O]	5.3	6.1	6.9	5.5
Submerged Closing [inH <sub>2</sub> O]	0.6	0.8	1.0	0.6
Vertical Opening [inH <sub>2</sub> O]	8.3	9.8	10.8	9.1
Vertical Closing [inH2O]	3.1	3.5	3.9	4.7
CO2 Equivalent (CO2e) [lb CO2e/unit]	132.6	129.4	-	129.3

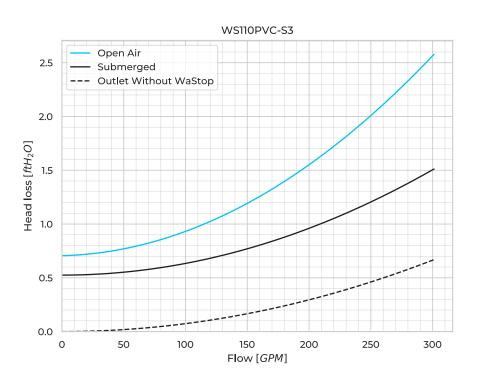

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com