


## **WASTOP® INLINE CHECK VALVE**

## WaStop 1485 Flange

Model Name	WS1485-FL
Nominal Diameter	DN 1500
Fasteners mtrl.	EN 1.4404
Flange bolt pattern	Wapro
Weight [kg]	580
Min. ID Host Pipe [mm]	1493
Max. ID Host Pipe [mm]	1530
Max. Flow Velocity [m/s]	5
Max. Flow Volume [m³/s]	8.84

## **Product Variants**

Art. No	WS1485-S3-FL-304/316
Membrane mtrl.	Polyurethane
Valve Body	EN 1.4301 / EN 1.4404
Max. Back Pressure [mH <sub>2</sub> O]	5
Horizontal Opening [mmH <sub>2</sub> O]	495
Horizontal Closing [mmH <sub>2</sub> O]	265
Submerged Opening [mmH <sub>2</sub> O]	300
Submerged Closing [mmH <sub>2</sub> O]	115
CO <sub>2</sub> Equivalent (CO <sub>2</sub> e) [kg CO <sub>2</sub> e/unit]	3058.7

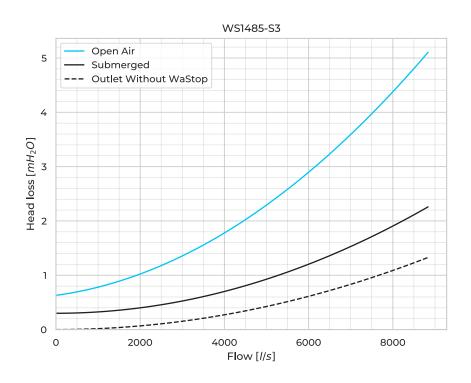

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved