


## **WASTOP® ACCESS**

## WaStop Access DN160 WS160

Model Name	WS160-WA425
Nominal Diameter	NPS/OD 6
Bracket	AISI 316L
Chamber	PE
Fasteners mtrl.	AISI 316L
Gate	PVC
Pipe connection	160 PE
Watertightness	EN 13564
Weight [lb]	30.9

## **Product Variants**

Art. No	WS160-WA425-S2	WS160-WA425-S3	WS160-WA425-S4
Membrane mtrl.	MVQ Silicone	MVQ Silicone	MVQ Silicone
Horizontal Opening [inH2O]	8.4	8.9	12.5
Horizontal Closing [inH <sub>2</sub> O]	3.4	3.4	3.8
Submerged Opening [inH <sub>2</sub> O]	6.1	7.1	7.5
Submerged Closing [inH <sub>2</sub> O]	0.9	1.0	1.6
Vertical Opening [inH <sub>2</sub> O]	9.3	10.4	11.4
Vertical Closing [inH <sub>2</sub> O]	4.9	5.5	6.5
CO2 Equivalent (CO2e) [lb CO2e/unit]	135.4	132.9	136.2
Weight [lb]	35.4	29.3	35.4

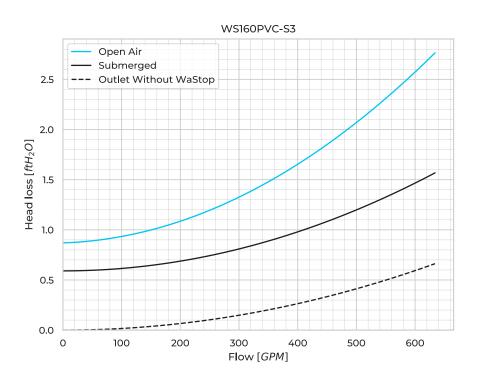

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com