


## WASTOP® PLASTIC SERIES

## WaStop 250 PE

-	
Model Name	WS250PE
Nominal Diameter	DN/OD 250
Fasteners mtrl.	EN 1.4404
Weight [kg]	6.3
Max. Flow Velocity [m/s]	2
Max. Flow Volume [l/s]	64

## **Product Variants**

Art. No	WS250PE-S3
Membrane mtrl.	EPDM
Valve Body	PE
Max. Back Pressure [mH <sub>2</sub> O]	5
Horizontal Opening [mmH <sub>2</sub> O]	200
Horizontal Closing [mmH <sub>2</sub> O]	115
Submerged Opening [mmH <sub>2</sub> O]	165
Submerged Closing [mmH <sub>2</sub> O]	45
Vertical Opening [mmH <sub>2</sub> O]	285
Vertical Closing [mmH <sub>2</sub> O]	170
CO2 Equivalent (CO2e) [kg CO2e/unit]	24.2
Weight [kg]	6.4

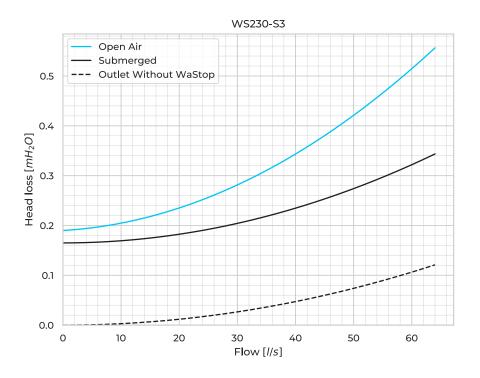

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved

Wapro AB Munkahusvägen 103 SE-37431 Karlshamn +46 (0)454 185 10 wapro@wapro.com