




WASTOP® INLINE CHECK VALVE

WaStop 390

Model Name	WS390
Nominal Diameter	DN 400
Fasteners mtrl.	EN 1.4404
Gasket	EPDM
Weight [kg]	20.3
Min. ID Host Pipe [mm]	393
Max. ID Host Pipe [mm]	411
Max. Flow Velocity [m/s]	3
Max. Flow Volume [l/s]	378

Product Variants

Art. No	WS390-S3-316	WS390-S4-316
Membrane mtrl.	Polyurethane	Polyurethane
Valve Body	EN 1.4404	EN 1.4404
Max. Back Pressure [mH ₂ O]	5	8
Horizontal Opening [mmH ₂ O]	385	410
Horizontal Closing [mmH ₂ O]	195	270
Submerged Opening [mmH ₂ O]	210	250
Submerged Closing [mmH ₂ O]	55	65
Vertical Opening [mmH ₂ O]	420	450
Vertical Closing [mmH ₂ O]	290	330
CO ₂ Equivalent (CO ₂ e) [kg CO ₂ e/unit]	118.1	124.7
Weight [kg]	20	21.7

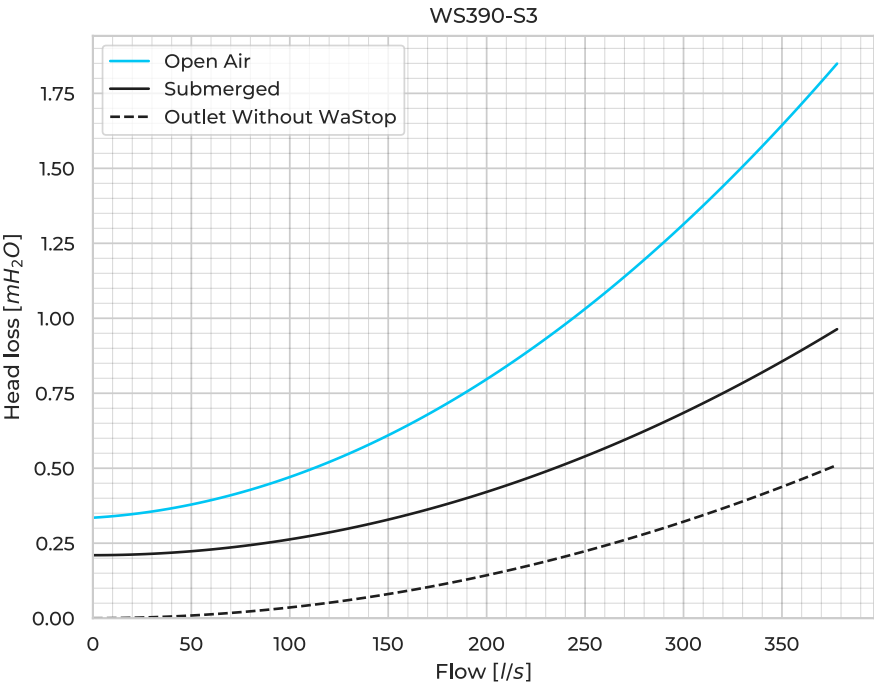

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved