


## **WASTOP® INLINE CHECK VALVE**

## WaStop 1485 Flange

Model Name	WS1485-FL
Nominal Diameter	NPS 60
Fasteners mtrl.	AISI 316L
Flange bolt pattern	Wapro
Weight [lb]	1278.7
Min. ID Host Pipe [in]	58.8
Max. ID Host Pipe [in]	60.2
Max. Flow Velocity [fps]	16.4
Max. Flow Volume [cfs]	312.04

## **Product Variants**

Art. No	WS1485-S3-FL-304/316
Membrane mtrl.	Polyurethane
Valve Body	AISI 316L / AISI 304
Max. Back Pressure [ftH <sub>2</sub> O]	16.4
Horizontal Opening [inH <sub>2</sub> O]	19.5
Horizontal Closing [inH <sub>2</sub> O]	10.4
Submerged Opening [inH <sub>2</sub> O]	11.8
Submerged Closing [inH2O]	4.5
CO <sub>2</sub> Equivalent (CO <sub>2</sub> e) [lb CO <sub>2</sub> e/unit]	6743.3

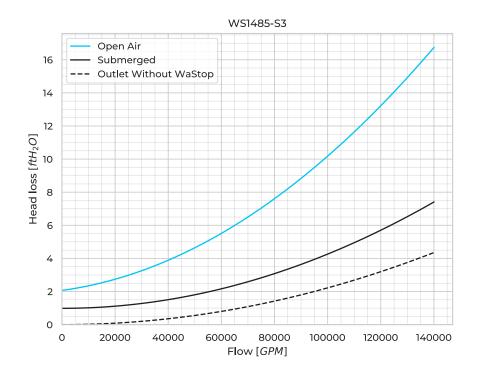

© 2025 Wapro AB. This document is subject to copyrights owned by Wapro AB. Any amendments, republication, retransmission, and/or reproduction of all or any part of the document is expressly prohibited, unless the copyright owner of the material has expressly granted its prior written consent. All other rights are reserved